
## GISClient Object Model


#### Esri® ArcGIS® 10.1 **ArcGIS for Server Client Object Model** Copyright © 1999-2012 Esri. All rights reserved. Esri, ArcGIS, ArcObjects, ArcGIS for Server, and ArcIMS are trademarks, registered trademarks, or service marks of Esri in the United States, the European Community, or certain other jurisdictions. Name in GeoDatabase **AGSServerConnectionName** IAGSServerConnectionName O ConnectionProperties: IPropertySet ConnectionType: esriAGSConnectionType **AGSServerObjectName AGSServerObject** IAGSServerObject O-IAGSServerObject : IUnknown IAGSServerObjectName : IUnknown IAGSServerObjectName O GeocodeServer in **AGSServerConnection** MapServer in Carto Location IAGSServerConnection : IUnknown IAGSServerConnection O ■ FullName: IName IAGSServerConnectionAdmin : IUnknow IAGSServerConnectionAdmin O- ServerObjectAdmin: IServerObjectAdmin ServerObjectConfiguration (in Name: String, in Type: String): IServerObjectConfiguration ServerObjectManager: IServerObjectManager AGSServerConnectionFactory IAGSServerConnectionFactory O-IAGSServerConnectionFactory : IUnknown Open (in pConnectionProperties: IPropertySet, in hWnd: OLE\_HANDLE): IAGSServerConnection ServerObjectManager **Enumerations** ServerObjectConfiguration esriAGSConnectionMode O - esriAGSConnectionModeConsumer in Server 1 - esriAGSConnectionModeAdmin esriAGSConnectionType 1 - esriAGSConnectionTypeLAN 2 - esriAGSConnectionTypeInterne ServerObjectAdmin tagesriAGSConnectionMode

## WMS Client Object Model

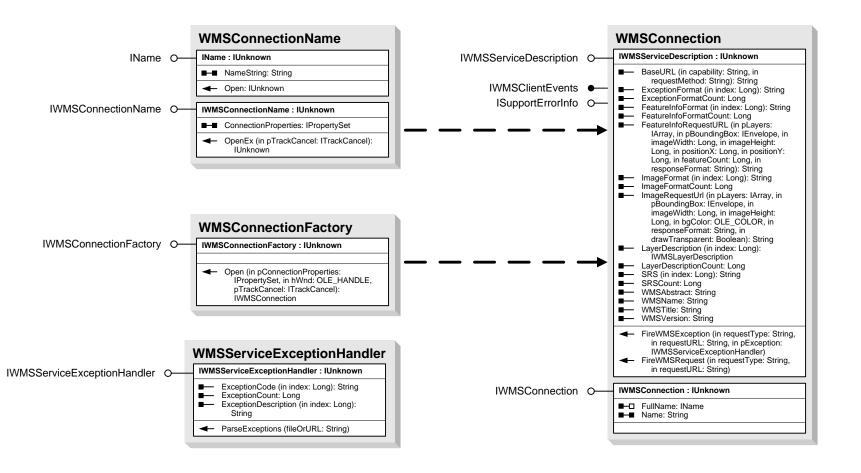

### **Interfaces**

0 - esriAGSConnectionModeConsume

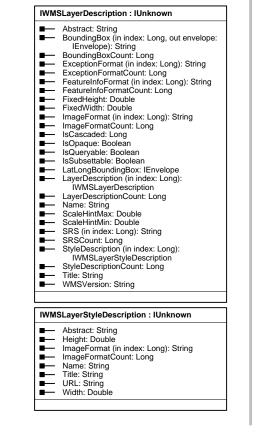

# ArcIMS Client Object Model

